



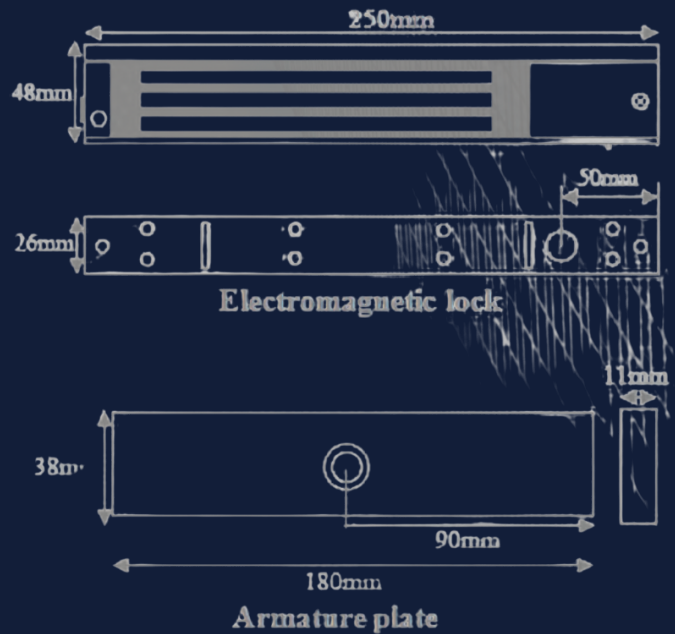

ELECTRO MAGNETIC LOCK

CLOUD-BASED ACCESS CONTROL SYSTEM | MOBILE ACCESS

EML - 600 / 600L

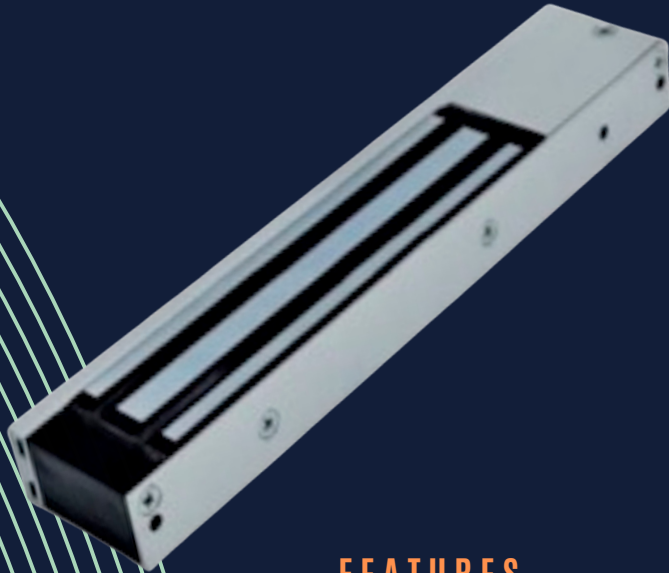

FEATURES

- MOV provides spike and surge protection PCB
- Anodized aluminum housing
- Adjustable mounting plate for easy installation
- Anti-residual magnetism designed.
- Complete mounting hardware included.
- Low Current Consumption.
- Reliable Holding Force.
- Full range of optional Brackets.

EML-600L

- Magnetic bond sensor monitors output
- Bi-color LED indicates lock/unlock

SPECIFICATIONS

EML-600/ EML-600L

Voltage Input: 12 VDC

Current Draw: 500mA /12VDC

Holding force: Up to 600lbs(272 kg)

Dimension: - Magnet - 250(L) x 48(W) x 26mm(T)

- Armature Plate -180(L) x 38(W) x 11mm(T)

Special Finishes for magnet and armature plate : Zinc Weight (approx): 2.0 Kg

EML-600L

Magnetic bond sensor monitor output
(the door is locked or unlocked status)

Status LED: Lights GREEN when the door is locked, lights RED when the door is unlocked.